



EPG Axial-Flow Submersible Pump Model AF06

October 2019

These reliable, low-maintenance storm water pumps are both economical and efficient. Axial-Flow lift provides smooth, low vibration, low pressure operation. These pumps are perfect for water quality & flood control solutions. They are equally suitable for municipal, industrial, agricultural, and aquacultural applications.

- High Volume: 550 -1700 GPM
- Low Head: 2 - 20' TDH
- Ideal for Wet Wells
- Vertical or Horizontal Styles
- Not a Trash Pump

- PUMP**
- Axial-Flow/Lift
 - Stainless Steel construction
 - Stainless Steel impeller, investment casting, dynamically balanced
 - Available in both vertical and horizontal models


- DISCHARGE:**
- 6" Diameter
 - NPT standard threading, male

- HORSEPOWER:**
- 5, 7.5, 10, 15
- 60 or 50 Hz SERVICE:**
- Single Phase or Three Phase

- VOLTAGE:**
- 200V, 230V, 460V, 575V



AF06 PUMP CURVES

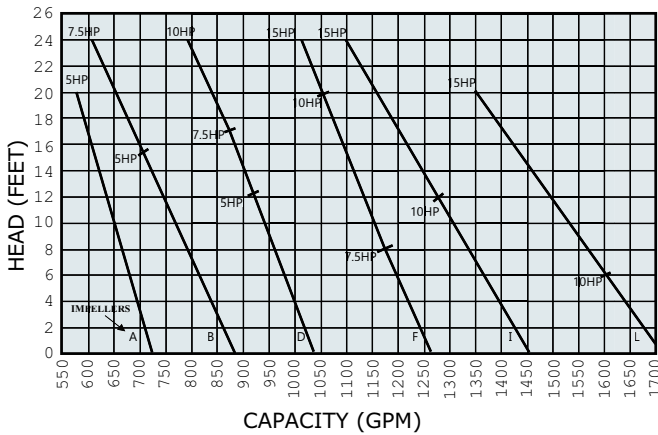

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


VERTICAL PUMP DIMENSIONS AF06 1 PHASE

| Dimensions | Weight | A-Minimum Submergence | B-Overall Height |
|------------|--------|-----------------------|------------------|
| 5HP | 176 | 29.50" | 35.50" |
| 7.5HP | 199 | 31.50" | 37.50" |
| 10HP | 214 | 37.50" | 43.50" |
| 15HP | 227 | 38.00" | 44.00" |

AF06 3 PHASE WITH SCREEN

| Dimensions | Weight | A- Height | B-Minimum Submergence | C-Screen Height |
|------------|--------|-----------|-----------------------|-----------------|
| 5HP | 204 | 35.50" | 29.50" | 24.50" |
| 7.5HP | 213 | 37.50" | 31.50" | 26.25" |
| 10HP | 225 | 38.50" | 32.50" | 27.25" |
| 15HP | 250 | 40.75" | 34.75" | 29.75" |

*****Larger Pumps Are Available*****

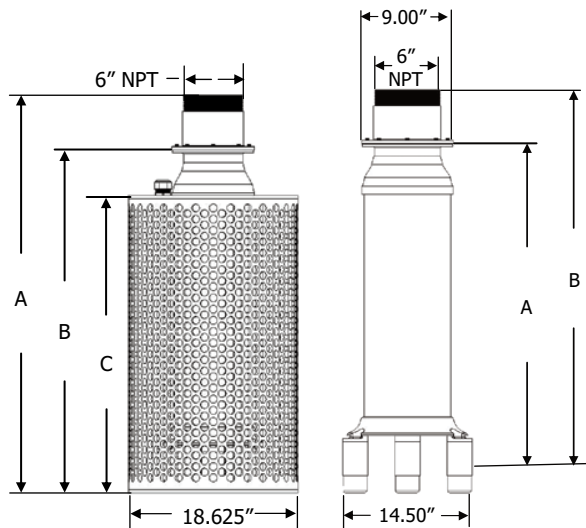

Pump shown with optional screen